



**ZEAL INTERNATIONAL** (An ISO 9001 Certified Company)

**Head Office:** 1, Netaji Subhash Marg Daryaganj, New Delhi - 110002 INDIA

Phone: +91-11-23276114, 23244474, 23250281, 23278846 Fax: +91-11-43580558

**Branch Office:** 4/20 Kirti Nagar Industrial Area New Delhi - 110015 Phone: +91 11 45380800

**Warehouse:** 4/26 Kirti Nagar Industrial Area New Delhi – 110015

[info@zealinternational.com](mailto:info@zealinternational.com)

[sales@zealinternational.com](mailto:sales@zealinternational.com)

[support@zealinternational.com](mailto:support@zealinternational.com)

[quotation@zealinternational.com](mailto:quotation@zealinternational.com)


Visit us at: [www.zealinternational.com](http://www.zealinternational.com)

## Say Bolt Viscometer ZI 4019

Standards: ASTM D88, D244, AASHTO T72

Specification:

Say bolt Viscometer, Electrically Heated, ASTM D88, D244, AASHTO T72 for the empirical measurement of Say bolt Viscosity of petroleum products at specified temperatures between 70OF and 210OF. This is also used for determining the Saybolt Furol Viscosity of bituminous materials at temperatures of 250, 275, 300, 350, 400 and 450OF. It comprises one each of Cylindrical Oil Cup, Universal Tip, Furol Tip, Bath Fitted with immersion Heater mounted on a stand. Dimmer stat for temperature control, Stirrer with shield. Complete with insulated handle and thermometer support receiving flask, withdrawal tube, filter funnel, thermometer support for cup and circular spirit level. Suitable for operation on 230 V 50 Hz, Single Phase, A.C.

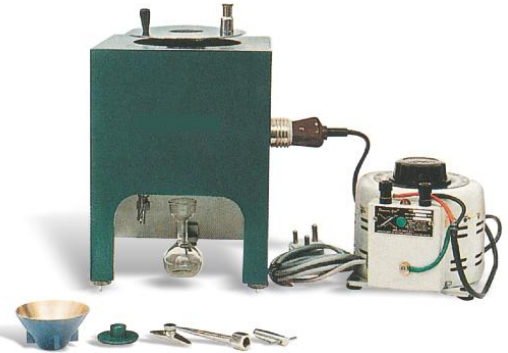

ZI 4019-A	Brass Oil Tube
ZI 4019-B	Receiving Flask, 60ml
ZI 4019-C	Universal and Furol Tip (Set of 2)
ZI 4019-D	Filter Funnel
ZI 4019-E	Thermometer Support
ZI 4019-F	Heating Coil
ZI 4019-G	ASTM Thermometer Type 18 F Range : 66°F to 80°F
ZI 4019-H	ASTM Thermometer Type 19 F Range: 94°F to 80°F
ZI 4019-I	ASTM Thermometer Type 19 F

Range: 120°F to 148°

ZI 4019-J	ASTM Thermometer Type 20F Range: 134°F to 148°F
ZI 4019-K	ASTM Thermometer Type 21 F Range : 174°F to 188°F
ZI 4019-L	ASTM Thermometer Type 22 F Range : 204°F to 218°F
ZI 4019-M	ASTM Thermometer Type 77F Range: 245°F to 265°F
ZI 4019-N	ASTM Thermometer Type 77F Range: 295°F to 315°F
ZI 4019-O	ASTM Thermometer Type 78 F Range: 345°F to 365°F
ZI 4019-P	ASTM Thermometer Type 80F Range : 395°F to 415°F
ZI 4019-Q	ASTM Thermometer Type 81F Range: 445°F to 465°F